

D-900s

Series Weighing Indicator

*The D900s are easy-to operate indicators for general use.
Stainless housing Ip67 with Outstanding performance.
Rechargeable battery or AC Adopter.*



Technical Data:

Hi resolution Weighing Indicator.
Stainless Steel Housing Ip-67.
Adjustable Parameters setting.
LED and LCD display.
Kg, lb.
HI, Lo Ok.
Gross & Net weighing.

STANDARD FEATURES & BENEFITS:

High Quality
NTEP Approved for 5000 Divisions
Stainless steel Enclosure IP 67 class
Full Duplex RS-232 Serial Port
Data hold function
I/O Card to perform automatic control external machine (option)
Display up to 30,000 graduations
Drives up to six 350Ω & twelve 700Ω load cells
Operates on AC Adapter or 9 Volt DC
4-20mA analog output (Optional)

For all weighing applications
Dust Proof and moisture proof!

D-900s



Series Weighing Indicator

Specifications:

Model:	D-900s
Accuracy class:	6000 e
Resolution display:	30,000
ADC:	2,000,000
Zero stability error:	TKo < 0.1μV//K
Span stability error:	TKspn < ± 6 ppm//K
Conversion time:	50 ms
Sensitivity (internal):	0.12 μV /count
Input voltage:	-30~30mV DC
Excitation circuit:	5 VDC, 4 wire connection, all strain gauge,min. 50Ω, e.g.:
Load cell:	6 load cells of 350Ω & 12 load cells of 700Ω
AC power	Adopter input 100~250VAC, Output 9V DC 1.2A
DC power	DC6V/4Ah rechargeable battery
Operating Temp:	- 10 °C ~ + 50 °C
Storage Temp:	- 40 °C ~ + 70 °C



Interface:

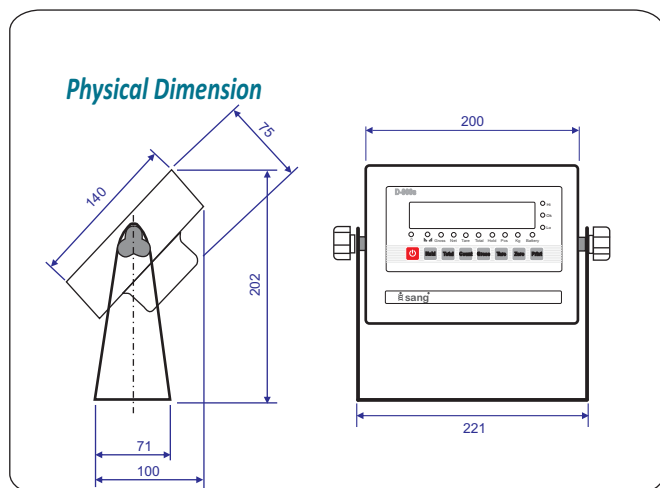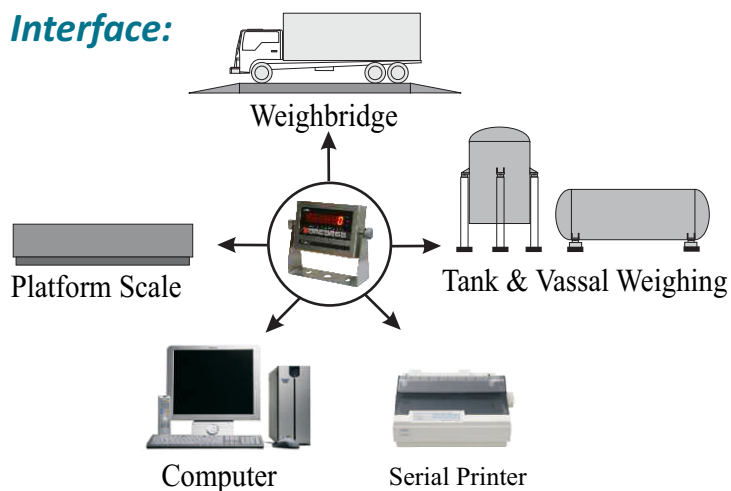

Reliable and Rugged! 